

### RIG DIMENSIONS

	Std. Rig	Racing Rig
I .....	37.04'	40.09'
J .....	10.83'	10.83'
P .....	37.86'	41.34'
E .....	12.96'	12.96'
Sail Area (100% $\Delta$ ) ...	460 sq. ft.	500 sq. ft.

### SPECIFICATIONS

L.O.A. ....	31'0"
L.W.L. ....	28'8"
Beam .....	10'7"
Draft .....	deep keel 5'11"
	shoal keel 4'3"
Displacement .....	7,054 lbs.
Ballast .....	deep 1,785 lbs.
	shoal 2,400 lbs.

# SPECIFICATIONS

# FIRST 310

## Equipment List

### DECK FITTINGS:

Anodized aluminum bow fitting with roller, tack attachment and 2 roller chocks  
 Self draining anchor locker  
 Anodized aluminum toe rails with 2 aft roller chocks  
 5/5 bow rail with navigation lights  
 5/5 opening stern rail with horse-shoe buoyholder and flagpole holder  
 5/5 tapered stanchions, double lifelines  
 Three anodized aluminum mooringcleats  
 Two coachhouse grabrails  
 Teak slatted cockpit benches with foothold  
 Self draining cockpit  
 Sail / Liferaft locker  
 Gas container locker  
 Winch handle pocket  
 Wheel steering with compass  
 Transom skirt with built in step  
 Opening transom with built in step for stern access  
 One flush Lewmar opening hatch above forward cabin  
 One altuglass tinted sliding companionway hatch  
 Nine Lewmar opening ports  
 One ventilation port on transom for aft cabin and sail locker  
 One companionway hatchboard  
 Two genoa tracks with adjustable cars  
 Two genoa sheet turning blocks  
 Two Lewmar 30 cst genoa sheet winches  
 One main coachroof mounted traveller with adjustable car  
 2 x 4 sheaves deck organizers  
 Three double spinlock deck stoppers  
 One Lewmar 16 cst winch for main halyard and sheet  
 One Lewmar 16 cst winch for genoa halyard and two reefs  
 One 5/5 pad eye for spinnaker downhaul  
 Backstay adjusting magic box on split backstay  
 5/5 flush upper and lower shroud chainplates (Beneteau patent)  
 One fresh water filler cap / 1 fuel filler cap / 1 waste deck outlet  
 Approved navigation lights  
 Manual bilge pump

### RIGGING

Anodized aluminum fractional rig  
 One set of spreaders  
 Mooring and steaming lights  
 1 x 19 5/5 standing rigging  
 Isofurl twin groove headfoil with furler  
 Running rigging  
 Main and genoa halyards, internal boom topping lift, boom vang, main and genoa sheets, reefing lines led to cockpit

### Sails

Main with 2 reefs, battens and bag  
 Genoa (130%)

### INTERIOR ACCOMMODATION

Varnished cherry interior

### Companionway

Hatchboard with vent  
 Polyester steps with non skid  
 Two wooden grabrails  
 5/8 altuglass sliding hatch  
 Anodized aluminum hatchboard frame  
 Removable lower companionway steps for engine access

### Aft cabin to port

Double berth  
 Shelf alongside hull  
 Hanging locker and shelves  
 Storage under berth  
 Two opening ports  
 One vent / port on transom  
 Two halogen lights with switches  
 Engine and stern gland access  
 Storage above engine compartment

### Head compartment starboard

USCG approved head with holding tank  
 Lockers  
 Handshower  
 Pressurized hot and cold water  
 Cupboard with mirror  
 Oilskins hanging space  
 Ventilation grill  
 One opening port  
 Shower tray with shower sump pump  
 5/5 towel holder  
 Light with switch

### Galley

Laminated working space  
 One 5/5 round sink  
 Pressurized hot and cold water  
 Extra large dry storage locker  
 Locker under sink, sliding basket, cutlery drawer, dustbin  
 Gimbale 2 burner propane stove with oven  
 Gas bottle in the cockpit with solenoid  
 Crashbar in front of oven  
 Locker under stove  
 Locker  
 One opening port  
 Grabrail  
 Halogen light  
 Dust collecting pan  
 Approx. 45 gallon fresh water tank

### Navigation station:

Chart table with locker  
 Book rack  
 Electronics installation panel  
 Eight function hinged electric panel (separately insulated connections)  
 One opening port for ventilation and light

Halogen light  
 Red night light  
 Grabrail  
 Hanging locker and shelves  
 Insulated icebox with baskets

### Main Salon

Wooden table with aluminum footing and supports, folding leaves and removable fiddles  
 Bottle rack in fixed part of table  
 Two settees/single berths  
 Shelves alongside hull with three lockers on each side  
 Anodized aluminum mast support  
 Four opening ports with curtains  
 Two fixed portlights in hull  
 Grabrail  
 Halogen light  
 Storage under berths  
 Moulded deck liner with wooden trim  
 Mast wiring access  
 Wood slatted hull liner  
 Teak and holly floorboards

### Forward cabin

Double berth  
 Shelf alongside hull  
 Hanging locker and storage to port  
 Storage under berth  
 Opening hatch with roller blind  
 Two lights  
 Access door

### Engine

Volvo 2002 18 HP  
 Fuel tank approx. 18.5 gallons  
 Engine instruments in cockpit (with fuel gauge), protected by plexiglass cover  
 Engine controls on pedestal  
 Engine start / stop in cockpit  
 Two bladed fixed propeller  
 Insulating foam in engine compartment


### Electrical

Electrical bilge pump  
 1 x 60 Amp. battery  
 110 volt shorepower

### MISCELLANEOUS

Two winch handles  
 Flag pole  
 Owners manual  
 Beneteau brief case

## INTERIOR LAYOUT

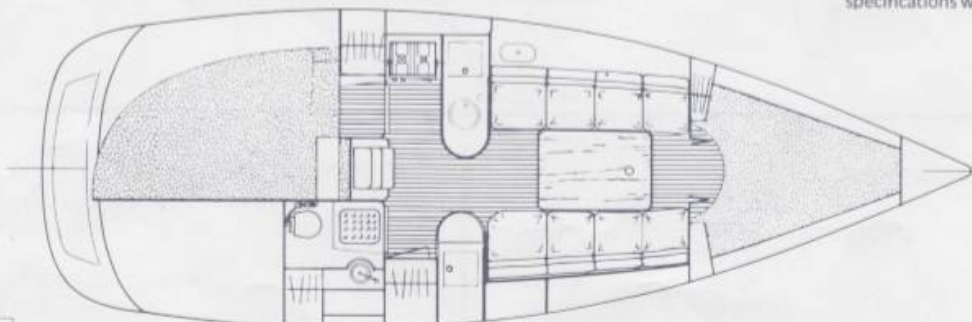

The manufacturer reserves the right to change price and specifications without notice



BENETEAU USA INC. 8720 RED OAK BOULEVARD SUITE 102 CHARLOTTE, NC 28217 FAX (704) 527-0760 PHONE (704) 527-8244